
POLY (PYRROLIUM AMION) STUDIES: ELECTROCHEMICAL SYNTHESIS AND PHYSICAL BEHAVIOR(U) MAYAL AIR DEVELOPMENT CENTER MARMINSTER PA AIRCRAFT AMD CREM S. . L J BUCKLEY ET AL. . 01 OCT 06 NAOC-06117-60 F/G 7/3 NO-R178 897 1/1 UNCLASSIFIED







## POLY (PYRROLIUM ANION) STUDIES: ELECTROCHEMICAL SYNTHESIS AND PHYSICAL BEHAVIOR

by

Dr. Leonard J. Buckley and James J. Katilaus Air Vehicle and Crew Systems Technology Department NAVAL AIR DEVELOPMENT CENTER Warminster, Pennsylvania 18974

**1 OCTOBER 1986** 

PHASE REPORT Project No. R02206 Program Element 61152N Work Unit GC178



Approved for Public Release; Distribution is Unlimited

Prepared for NAVAL AIR DEVELOPMENT CENTER Department of the Navy Warminster, PA 18974

Unclassified	
--------------	--


SECURITY CLASS F CATION OF THIS PAGE

HD-	11	1	78	0	9	7
11/11		/	10		•	/

REPORT DOCUMENTATION PAGE  To REPORT SECURITY CLASSIFICATION I to RESTRICTIVE MARKINGS										
Unclassified		'b RESTRICTIVE	MARKINGS N/A							
29 SECURITY CLASSIF CATION AUTHORITY	<del></del>	3 DISTRIBUTION	AVAILABILITY OF	REPO	)RT					
IS DECLASS FICATION DOWNGRADING SCHEDU	LE .	Approved f	or Public Relea	ise; D	istribution is Unlimited					
4 PERFORMING ORGANIZATION REPORT NUMBE	R(S)	5 MONITORING	ORGANIZATION RE	PORT	NUMBER(S)					
NADC-86117-60			N/A							
64 NAME OF PERFORMING ORGANIZATION	60 OFFICE SYMBOL (If applicable)	78 NAME OF ME	ONITORING ORGAN	NIZATI	ON					
Naval Air Development Center	(,, spp.,,		N/A							
6c ADDRESS (City, State, and ZIP Code)		70 ADDRESS (Cr	ty, State, and ZIP C	ode)						
Warminster, PA 18974		N/A								
BU NAME OF FUNDING SPONSORING BO OFFICE SYMBOL 9 PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER OPERANIZATION (If applicable)										
Naval Air Development Center	(IT applicable)	1	N/A							
3c. ADDRESS (City, State, and ZIP Code) 10. SOURCE OF FUNDING NUMBERS										
·		PROGRAM ELEMENT NO	PROJECT NO	TASK NO	WORK UNIT					
Warminster, PA 18974		61152N	R02206		GC178					
TITLE (Include Security Classification)										
(U) Poly (Pyrrolium Anion) Studies: Electrochemical Synthesis and Physical Behavior										
2 PERSONAL AUTHOR(S) Dr. Leonard J. Buckley and Mr. James J. Katilaus										
3a TYPE OF REPORT 3b TIME (		4 DATE OF REPO	ORT (Year, Month, I	Cay)	15 PAGE COUNT					
Phase FROM Oct 85 TO Oct 86 86-OCT-1										
16 SUPPLEMENTARY NOTATION										
17 COSATI CODES	18 SUBJECT TERMS	(Continue on revers	e if necessary and	identi	fy by block number)					
FIELD GROUP SUB-GROUP	4									
	1									
'9 ABST ACT (Continue on reverse if necessary	and identify by block	number)								
					4.4					
Conductive polymers exhibit applications which include coating	many unique phys	ical property co film devices C	onductive and	at lead	d to a variety of					
most promise with respect to envir										
anion) materials have been synthes	sized electrochemic	ally using novel	dopant counte	erions	s. The counterions					
(substituted benzenesulfonates) we size from small (8 angstroms) to la										
dopant anion used in the synthesis										
greatly. X-ray diffraction studies h	ave shown varying	peak breadths i	ndicating a diff	ferend	ce in molecular					
order among the polymers. Interre	lationships between									
mechanical behavior have been add	ressed. / Key ic				bin weer)					
20 DISTRIBUTION AVAILABILITY OF ABSTRACT  DI UNCLASSIFIED UNLIMITED - SAME AS	RPT DTIC USERS		CURITY CLASSIFICA	TION						
228 NAME OF RESPONS BLE INDIVIDUAL			(Include Area Code)	22c						
Leonard J. Buckley		<u></u>		<u> </u>	6063					

## TABLE OF CONTENTS

																										Page
LIST	OF	TAB	LES	•	•	•	•				•		•					٠		•						1i
LIST	OF	FIG	URE	S.	•			•		•	•		•			•		•	٠							iii
INTR	ODU	CTIO	N.						•				•		•			-								1
																										4
RESU	LTS	AND	DI	SCI	JS	SIC	NC		•			•		•	•	•	•	٠	•	•.		٠				10
FUTU	RE S	STUD	IES	•	•									•					•							19
ACKN	OWL	EDGE	MEN	TS		•	•	•	•			•	٠	•								•				20
REFE	REN	CES																								21



## LIST OF TABLES

											Page
I.	Synthesis Conditions										6
II.	Electrical Conductivity										12
III.	Mechanical Behavior	•		•							13
	Poly(Pyrrolium Anion) X-Ray Data										

## LIST OF FIGURES

1.	Electrolytic Cell for Poly(Pyrrolium Anion) Synthesis	Page 5
2.	Geometry of X-Ray Diffraction Set-up	8
	Description of X-Ray Diffraction Reflection Mode	
	Chemical Structures of Dopant Anions	
	SEM Photographs of Polypyrrole/Tosylate	
	SEM Photographs of Polypyrrole/Ethyl Benzenesulfonate	
	Reflection Mode X-Ray Diffraction Peaks	

consiste sections approprie manner


## INTRODUCTION

Oxidized polypyrrole has exhibited exceptionally good environmental stability compared to other electrically conductive polymers. Minimal conductivity changes occur upon exposure to ambient environments [1]. Low density, controllable conductivity, and excellent chemical resistance make this conductive polymer an interesting material choice for photoelectrode protection, chemical sensors and conductive coatings. Changes in the composition and morphology have been found to vary with the synthesis conditions and type of counterion [2]. A more extensive understanding of the molecular structure may allow finer control of the physical behavior.


The electrochemical synthesis of conductive polypyrrole was first demonstrated by Dall'Olio in 1968 [3]. In this experiment thin films approximately lum thick were prepared by the electrochemical oxidation of pyrrole and were found to have a room temperature conductivity of 8  $(ohw-cm)^{-1}$ . A unique feature of this particular conductive polymer was its environmental stability in the oxidized (conductive) state. This was the first conductive polymer to exhibit minimal loss in electrical conductivity upon exposure to the atmosphere. One of the causes for the stability is the sharing of the positive charge of the backbone by the heteroatom leaving all atoms in the polymer with complete octets. This decreases the reactivity of the molecule to oxygen or moisture.

In 1979 Diaz and co-workers prepared free-standing polypyrrole films approximately 50µm thick [4]. These films were reported to have a room temperature conductivity of 100 (ohm-cm)<sup>-1</sup>. On the basis of electrochemical and spectroscopic data the pyrrole polymerization is believed to involve oxidative coupling at the alpha-carbons with simultaneous oxidation resulting in the incorporation of a counterion from the electrolyte.


The mechanism of polypyrrole polymerization has been suggested by Street et al., and begins with the generation of radical cations at the anode [5].



Propagation may then proceed by reaction of two radical cations, pairing the spins and eliminating two protons to produce the neutral dimer.

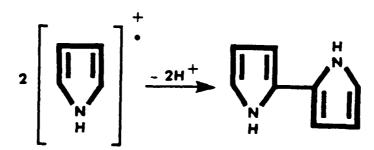

The dimer and higher oligomers can also be oxidized to form radical cations. Chain propagation continues by reaction of the oligomer radical cation primarily with the radical cation of the monomer, which is present in high concentration in the region of the anode. As the chain grows, the polypyrrole oligomer becomes insoluble and eventually precipitates out on the electrode, where the chain can continue to grow until the oligomer radical cation becomes too unreactive or until it is sterically prevented from reacting. Additional oxidation of the polypyrrole chain leads to the formation of cationic sites with incorporation of the counterion from the electrolyte to maintain charge neutrality. Conductive (oxidized) polypyrrole has the following chemical structure.

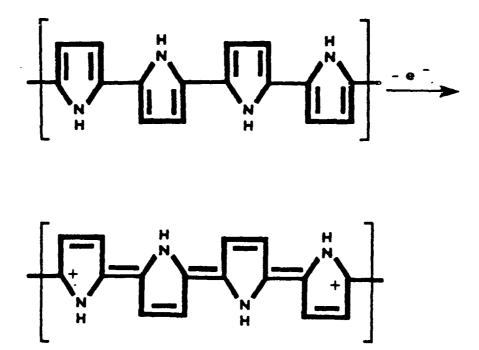

### **EXPERIMENTAL**

An electrolytic cell was used in the synthesis of the polypyrrole/anion films (See Fig. 1). This cell consisted of a 2 liter capacity battery jar with a vitreous carbon anode and a platinum mesh cathode that produced a film of approximately 75 cm $^2$ . The carbon anode size was 10.2 cm x 10.2 cm. The cathode consisted of 2 pieces of platinum mesh (each 5.1 cm x 10.2 cm). The platinum was supported by means of a 10.2 cm x 10.2 cm glass plate. A spacing of 3.5 cm between the anode and cathode was used. An Ag/Ag (Ag in 0.1 M AgNO $_3$  and acetonitrile) reference electrode was used to determine the potential.

All of the syntheses were performed under constant potential. The current density was monitored throughout each syntheses (See Table I). In addition the syntheses were performed with the battery jar covered to minimize evaporation and at  $23\,^{\circ}$ C and approximately 50% relative humidity.

The polypyrrole films were prepared according to the method developed by Wynne and Street for the synthesis of Polypyrrole/Tosylate films without special precautions to exclude air [6]. The cell solution consisted of pyrrole (0.3M), the dopant species (0.15M) and 1050 ml of acetonitrile. The pyrrole was passed through activated alumina prior to use. Chromatography grade acetonitrile was used without further purification. A small amount of demineralized water (0.5%) was added to the solution to enhance the cathode reaction (reduction of protons.) During the syntheses, the amount of solution covered approximately 10.2 cm x 7.2 cm of the carbon anode. Film thickness ranged from 0.127 mm to 0.254 mm.

Benzene sulfonates and substituted benzene sulfonates were synthesized for use as the dopant counterions. All were synthesized with the exception of the tetraethylammonium-p-toluene sulfonate which was obtained from Alfa Products. Each of the electrolyte salts was prepared in the following manner:

The respective sulfonic acid and base (tetraethylammonium hydroxide, 40%) were mixed on a 1:1 molar basis. The reaction mixture was then stirred for 1 hour at ambient temperature using a magnetic stirrer. Aliquots were then diluted 50/50 with methanol and stripped under vacuum using a Buchi roto-vap. When completed, the remaining salt solution was again diluted with methanol, heated and then filtered. The filtrate was then evaporated in an open beaker while being stirred. The remaining salt was then refrigerated overnight. The salt was then dried in a vacuum oven overnight. Proton Nuclear Magnetic Resonance was then run on the resultant products.

All dopant preparations were routine with the exception of the dodecyl salt. Upon mixing of the dodecylbenzenesulfonic acid and base, the resultant product was a viscous fluid. This problem was alleviated by adding methanol to the mixture before stirring.

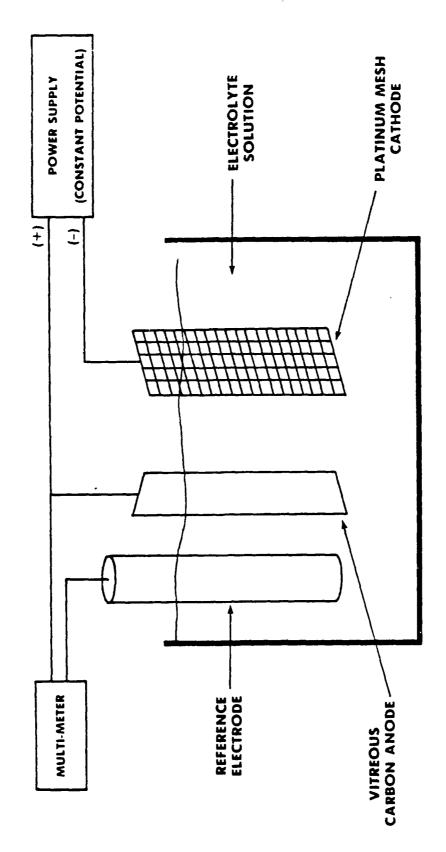


Figure 1. Electrolytic Cell for Poly(Pyrrolium Anion) Synthesis.

CONDITIONS
SYNTHESIS C
. i
ABLE

TP Table 1

the property of the section of the s

	TABLE I.	TABLE I. SYNTHESIS CONDITIONS		11
MATERIAL	APPLIED VOLTAGE (V)	Ag/Ag REFERENCE (V)	CURRENT DENSITY (mA/cm <sup>2</sup> )	Table
PP+/BS-	3.0	0.55	0.76	•
PP <sup>+</sup> /OTs <sup>-</sup>	3.0	0.54	0.54	
PP <sup>+</sup> /2,5-DMBS	3.0	0.54	0.58	
PP <sup>+</sup> /EBS <sup>-</sup>	3.0	0.55	0.74	
PP <sup>+</sup> DBS-	3.0	0.55	0.75	
PP <sup>+</sup> BPS <sup>-</sup>	3.0	0.55	9*0	
-				

The chemicals and materials used for the syntheses were the following:

## CHEMICAL

Benzene Sulfonic Acid
2.5 Dimethylbenzene Sulfonic Acid
Ethylbenzene Sulfonic Acid
Dodecylbenzene Sulfonic Acid
Biphenylbenzene Sulfonic
Aluminum Oxide
Tetraethylammonium Hydroxide
Acetonitrile, HPLC Grade

Pyrrole

Tetraethylammonium-p-Toluene Sulfonate Carbon Electrode

### SUPPLIER

Kodak Laboratory Chemicals
Kodak Laboratory Chemicals
Alfa Chemicals
Alfa Chemicals
Camag
Alfa
Fisher Scientific
Burdick & Jackson
Alfa Chemicals
Aldrich Chemicals
Alfa Chemicals
Alfa Chemicals
Alfa Chemicals
Atomeric Chemetals


Electrical conductivity was determined by a four point probe technique as described by Wieder [7]. The mechanical behavior was assessed by determining the ultimate tensile strength, strain to failure, and tensile modulus using an Instron Test Machine. A strain rate of 0.05 inch/min. was used. Samples were cut to 0.5 inch width strips approximately 3.5 inches in length. Testing was done under ambient conditions (23°C and 50% RH). Scanning electron microscopy (SEM was performed with an Amray-1000 instrument.

X-ray diffraction studies were performed using a Rigaku D/MAX-11TB system with a Theta/Theta Goniometer. The power level was 50 kV and 20 mA. The geometry of the X-ray set-up is shown in Fig. 2. The sample was kept stationary while scattering angles from  $0^{\circ}$  to  $40^{\circ}$  were scanned in the Reflection Mode [See Fig. 3]. The scanning rate was  $5^{\circ}$ /min and the data was summed over  $10^{\circ}$  scans. This process provided greater intensity than is normally seen for a single scan which is needed due to the weak scattering of the thin film polymers.

# RIGAKU D/MAX-11TB (2.0 kW)

# THETA/THETA GONIOMETER (STATIONARY SAMPLE)

50 kV; 20 mA

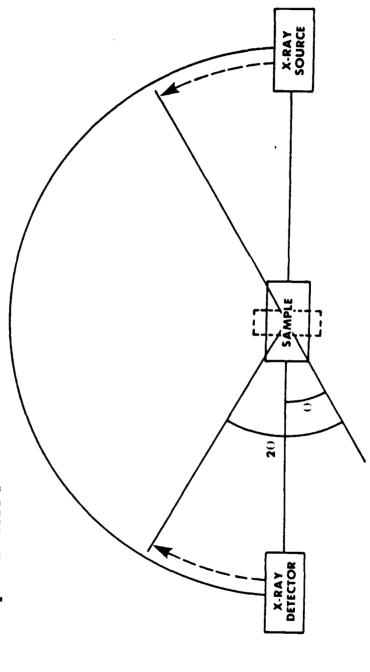

532-GA-86 02372

Figure 2. Geometry of X-Ray Diffraction Set-Up

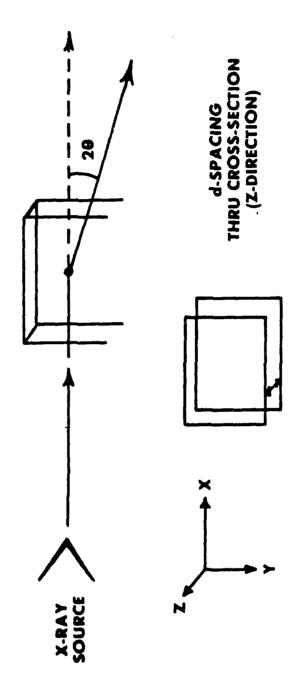


Figure 3. Description of X-Ray Diffraction Reflection Mode


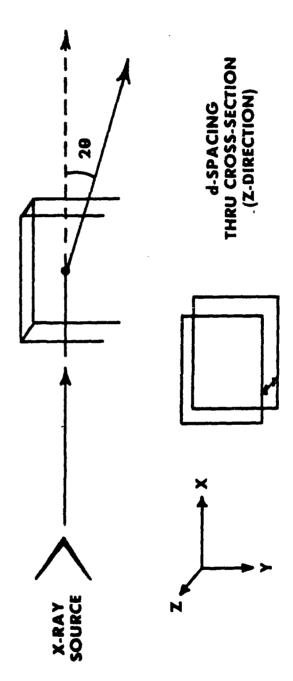


Figure 3. Description of X-Ray Diffraction Reflection Mode

SUBSTITUTE OF SUBSTITUTE STREET, INDICATED


Acceptate processes processes processes posses



-503-

**BENZENE SULFONATE (BS)** 


BIPHENYL SULFONATE (BPS)




2,5-DIMETHYLBENZENE SULFONATE (2,5-DMBS)



P-TOLUENE SULFONATE (OTs)



ETHYLBENZENE SULFONATE (EBS)



532-GA-86-02377

Figure 4. Chemical Structures of Dopant Anions

## TABLE II. ELECTRICAL CONDUCTIVITY

## MATERIAL

## CONDUCTIVITY (OHM-1 CM-1)

PP+/2,5 DMBS-

ESSENT TO THE PROPERTY OF THE SERVICES TO THE PROPERTY OF THE

532-GA-86-02376

 $PP^+/OTs^-$ 

PP+/BS-

PP + / DBS-

TABLE III. MECHANICAL BEHAVIOR

MATERIAL	JUTS (PSI)	E <sub>T</sub> (KSI)	(F
PP + /OTs -	10589	208	0.27
PP+/BS-	7292	. 160	0.37
PP+/DBS-	6072	124	0.00
PP + /2, S.DMBS-	4903	359	0.01
PP+/OTs (DRY)	10227	235	0.13
PP+/CIO4-	9220	160	0.22

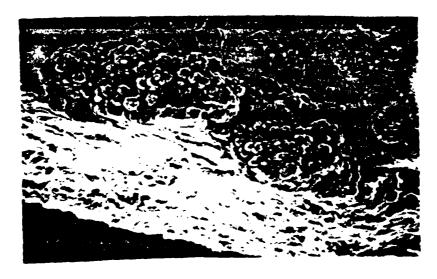






Figure 5. Scanning Electron Microscopy Photographs of Polypyrrole/Tosylate Fracture Surfaces Showing the As-Grown Solution Side Morphology. [Top-500X; Middle-1000X; Bottom-2000X]





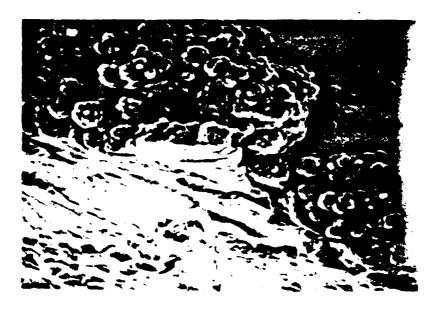


Figure 6. Scanning Electron Microscopy Photographs of Polypyrrole/Ethyl Benzenesulfonate Fracture Surfaces Showing the As-Grown Solution Side Morphology. [Top-500X; Middle-1000X; Bottom-2000X].

X-ray diffraction studies were done to investigate the extent of order within the conductive polymer structures. D-spacings from the reflection mode peaks are given in Table IV. The low-angle peaks correspond to the anions while the wide-angle peaks correspond to the polypyrrole chains. The breadth of the wide-angle peaks is being studied as an indication of the extent of molecular order. The integral breadth is defined as the following [12]:


$$\beta_{i} = \frac{\int i \delta2\theta}{I_{MAX}}$$

Fig. 7 shows the diffraction peaks for each of the materials (reflection mode). Tosylate, benzene sulfonate, and dodecylbenzene sulfonate materials exhibit structured peaks that are much less broad than the other anions. These materials exhibited the best physical properties which may be due to the increased molecular order or a more well-defined structure. Additional work is being done to understand this technique and how it may be used to investigate the structure of glassy polymeric solids.

TABLE IV. POLY (PYRROLYIUM ANION) X-RAY DATA

ANION	20	d (Å)	20	<b>d</b> (Å)
	5.3 (S)	16.6	25.3 (S)	3.5
	3.6 (SS)	24.3	22.9 (B,S)	3.9
	5.6 (B,W)	15.4	25.5 (S)	3.5
	4.7 (B,W)	18.5	22.7 (B,W)	3.9
	1	1	23.3 (B,W)	3.8
	i 1 1	i ! !	21.8 (B,W)	4.0
<b>Z</b>	(REFLECTION MODE)	W – WEAK, B – BROAD, S SS – STRONG AND SHARP	W – WEAK, B – BROAD, S – STRONG, SS – STRONG AND SHARP	ONG,

12.GA-86-02947

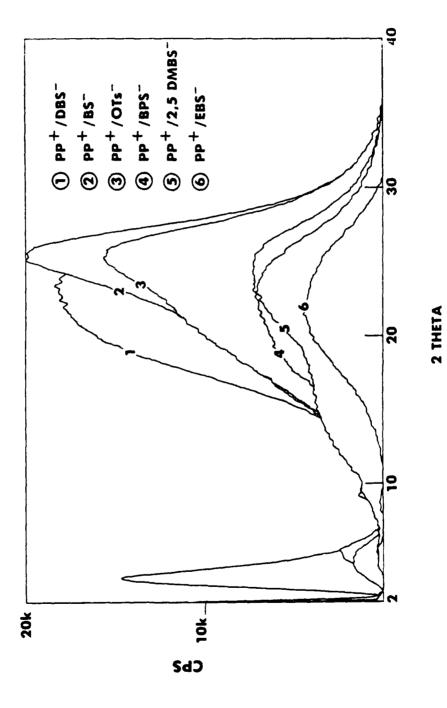

Reflection Mode Diffraction Peaks for Various Poly (Pyrrolium Anion) Materials Figure 7.

DOSSESSI RESERVED RESERVE

## FUTURE STUDIES

Clearly, the physical properties of Poly (pyrrolium anion) materials are strongly influenced by the type of anion used in the synthesis. Future work will consist of investigating additional depant anions that have not been previously studied. These anions will include sulfonated ferrocenes prepared as sodium and/or ammonium salts. In these materials the cyclopentadienyl rings are freely rotating which may allow for an easier fit into the polymer structure. X-ray diffraction studies will be continued in the transmission mode as well as in the reflection mode. Interrelationships between molecular structure, electrical conductivity, and mechanical behavior will be investigated. The study of diffraction peak broadening for the determination of the extent of molecular order will be continued. The validity of this approach will be examined by investigating the broadening effects due to residual strain and orientation.

The surface properties will also be investigated including the surface tension and morphology. The surface tension shall be determined with a contact angle goniometer and the surface morphology using scanning electron microscopy (SEM).

## ACKNOWLEDGEMENTS

The authors would like to express their sincere appreciation to B. Duffy, J. Duffy, and S. Burns for their fine contributions to this effort. Also, the authors would like to thank W. Wiest for the scanning electron microscopy efforts.

## REFERENCES

- 1. Samuelson, L., Druy, M., Macromolecules, in press.
- Buckley, L.J., Ph.D. Thesis, Massachusetts Institute of Technology, Cambridge, Ma. (1985).
- 3. Dall'olio, A. et al., Acad. Sci. Ser., 207 (1908).
- 4. Diaz, A., Kanazawa, K., Gardini, G., J.C.S. Chem. Comm., 635, (1979).
- 5. Street, G. et al., IBM J. Res. & Develop. (1983).
- 6. Wynne, K., Street, G., Macromolecules, 18, 2361 (1985).
- 7. Wieder, H., Laboratory Notes on Electrical & Galvanomagnetic Measurements, Elsevier (1979).
- 8. Buckley, L.J., Wnek, G., Roylance, D., Polym. Mater. Sci. & Eng. 53, 101 (1985).
- 9. Buckley, L.J., Presentation ACS Division of Inorganic Chemistry (Sept. 1986).
- 10. Street, G., et al., Mol. Cryst. Liq. Crust., 118,137 (1985).
- 11. Ogasawara, M., et al., Mol. Cryst. Liq. Cryst., 118,159 (1985).
- 12. Von Laue, M., Z. Krist., 64, 115 (1926).

## DISTRIBUTION LIST

## REPORT NO. NADC-86117-60

No. of Copies	5
Northrop Corporation	
Defense Technical Information Center	
Commander	
Celanese Research Company	
Vought Corporation	
NASA Headquarters	
Boeing Aerospace Co	
Naval Air Systems Command	
Office of Naval Research	
Office of Naval Research, Boston	

## DISTRIBUTION LIST

## REPORT NO. NADC-86117-60

	No. of Copies
B.F. Goodrich Aerospace and Defense Products	1
Plastics Technical Evaluation Center	1
Massachusettes Institute of Technology	3
Rockwell International Corp	1
Dept. of Mats. Sci	2
Dept. of Chemistry	1
NAVAIRDEVCEN	38

## DISTRIBUTION LIST

## REPORT NO. NADC-86117-60

	No. of Copies
Lockheed California Co	I
General Dynamics	1
General Dynamics	1
Rockwell International Science Center	3
NASA	2
United Aircraft Corp	1
Army Materials Technology Lab	3
Hercules, Inc	2
University of MA	1

Same Harrigas Lacarage Franching Parabolog Referent Proposition Proposition (University Franchis Perabolog)